





F6 RIGID POCKET FILTER



The EFS F6 Rigid Pocket Filters

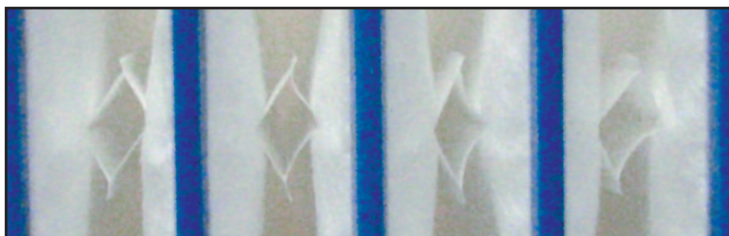

Spacers Stabilize Pocket Shape

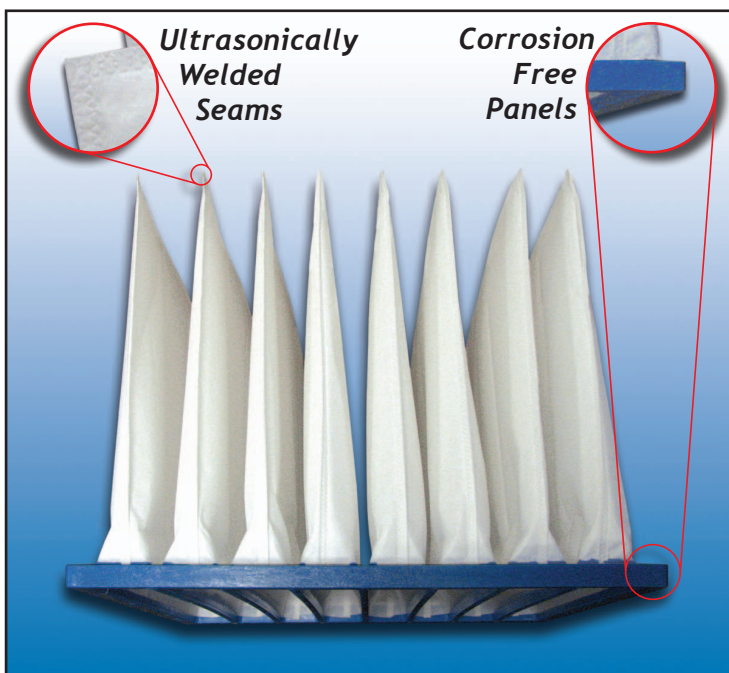

*Ultrasonically
Welded
Seams*

*Corrosion
Free
Panels*

RIGID CONSTRUCTION

- The EFS F6 Rigid Pocket Filter is constructed to withstand extreme humidity, high velocities and turbulence and is excellent for all types of air handling systems.
- Self-supported filter pockets stay rigid in the air stream.
- The filter element is free of metal parts, eliminating the risk of corrosion and punctures.
- Polyurethane header ensures a leak-proof bonding of pockets to header.

SYNTHETIC MEDIA

- Synthetic media rated at ASHRAE 65% (MERV 11)
- Non-shedding fibers are specially designed to resist moisture and chemicals.
- Resists all types of bacterial growth.

DISTRIBUTED BY...



AIR FILTERS NORTHWEST, INC.
503.968.3261 • www.AirFiltersNW.com


UNIQUE DESIGN

- The EFS F6 Rigid Pocket Filter is light-weight and easy to handle which provides for low-cost transport and disposal.
- Progressively structured design provides exceptionally low pressure drop at high efficiency levels.
- Spacers channel the air entering the pocket resulting in lower pressure drop and reduced energy costs.


ENGINEERED FILTRATION SYSTEMS

F6 RIGID POCKET FILTER

PARTICLE SIZE EFFICIENCY

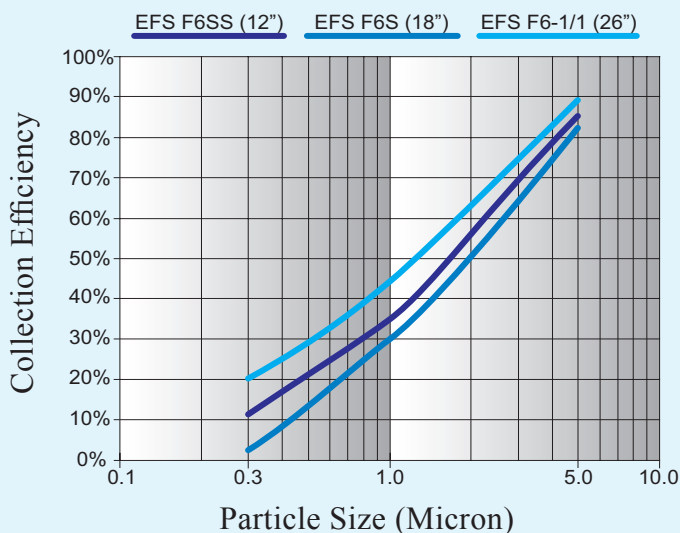

RESISTANCE CURVE

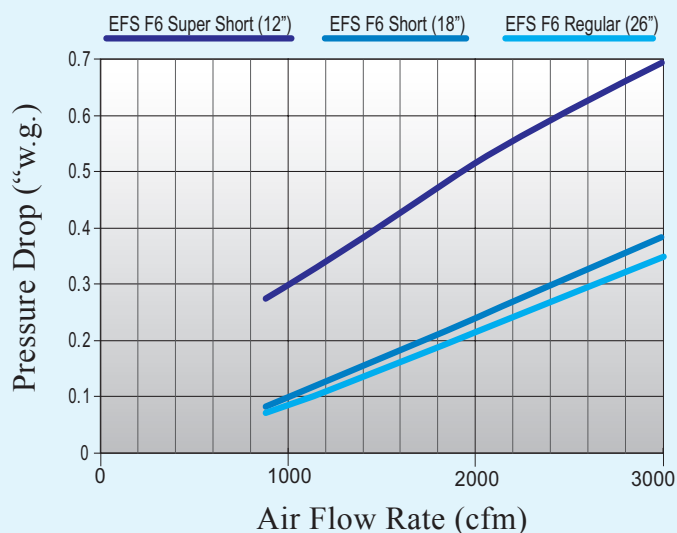

TESTED PARAMETERS

ASHRAE 52.2 RATING @ 2000 cfm	MERV 11
ASHRAE 52.1 DUST SPOT EFFICIENCY	64%
DUST HOLDING CAPACITY @ 1.5" w.g.	3,400 gms
DUST HOLDING CAPACITY @ 4.0" w.g.	5,074 gms
BURST STRENGTH	25" w.g.

APPLICATION PARAMETERS

MAXIMUM TEMPERATURE	150 F
FLAMMABILITY	UL 900 Class 2
CALIFORNIA STATE FIRE MARSHAL	Rated
MEDIA	Synthetic
RELATIVE HUMIDITY	100%
RECOMMENDED FINAL PRESSURE DROP	1.5" w.g.

DIMENSIONS and PERFORMANCE DATA

65% PART NUMBER	SIZE H x W x D (inches)	NUMBER OF POCKETS	MEDIA AREA (sq. ft.)
EFS-F6SS	24" x 24" x 12"	8	30
EFS-F6S	24" x 24" x 18"	8	48
EFS-F6-1/1	24" x 24" x 26"	8	63
EFS-F6SS-1/2	12" x 24" x 12"	4	18

TECHNICAL DATA

FILTER DEPTH (inches)	AIR FLOW (cfm)	INITIAL PRESSURE DROP ("w.g.)	COMPARABLE ATMOSPHERIC EFFICIENCY (ASHRAE 52.1) @ 2000 cfm
12	2000	0.52	60% - 65%
18	2000	0.23	60% - 65%
26	2000	0.22	60% - 65%
12	1000	0.22	60% - 65%

DISTRIBUTED BY...



AIR FILTERS NORTHWEST, INC.

Phone: 503.968.3261 • Fax: 503.968.3262 • www.AirFiltersNW.com

ENGINEERED FILTRATION SYSTEMS

www.EngineeredFiltrationSystems.com