

Prime11

Standard & High Capacity Pleated Filters

OVERVIEW

The Prime11 is an extended surface, pleated air filter, created to provide high efficiency, high dust holding capacity and low pressure drop. The Prime11 is available in standard capacity as well as high capacity (Prime11HC). As an extended-surface air filter, the Prime11, performs at superior levels in comparison to standard pleated filters. The Prime11 is an economic choice for the efficiency and overall excellent performance it provides. The Prime11 has a MERV 11 rating per ASHRAE Test Standards 52.2. and is pending UL 900 Classification testing.

The Prime11 was created to provide higher initial efficiencies and better overall performance than standard pleated filters, making it the perfect upgrade from our Prime8 filters as well as other standard MERV 8 pleated filters.

CONSTRUCTION

The Prime11 has a durable, moisture-resistant, beverage board frame with wire-supported media. The Prime11's media is an electrostatic blend of synthetic fibers that is designed for use specifically in extended surface pleated filters. The standard capacity Prime11 was engineered as an efficient and economic option with outstanding overall performance. The Prime11HC comparable in construction to the Prime11 but offers more media which extends the life of the filter.

APPLICATION

The Prime11, standard capacity, should be used in applications where filter change-out is based on preventative maintenance. The Prime11HC pleated filters should be used in filtration systems where change-out is based on recommended final pressure drop.

Applications that would benefit from the Prime11 pleated air filter include commercial office buildings, pharmaceutical plants, hospitals and laboratories and other facilities where a higher degree of clean air is required.

ADDITIONAL PLEATED OPTIONS


- Prime8 - Standard & high capacity MERV 8 filters (see DS208)
- Prime13 - High efficiency MERV 13 filters (see DS213)
- PrimeHT - High temperature filters (see DS208HT)
- PrimeE - Economy filters (see DS208E)



PRODUCT SPOTLIGHT

- MERV 11 efficiency
- Extended surface
- High dust holding capacity
- Less pressure drop
- Wire-supported electrostatic media
- Moisture resistant beverage board frame
- Available in 1", 2" & 4"
- Max Operating Temp: 180°F

TECHNICAL DATA

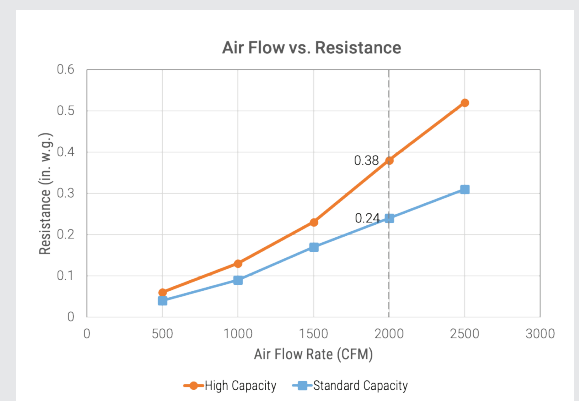

*Based on 2" depth

Primell

Standard & High Capacity Pleated Filters

PERFORMANCE DATA

Nominal Depth	Nominal Size (WxHxD)	Actual Size (in.)			Air Flow @ Capacity (CFM)	Resistance @ Capacity (in. w.g.)		Total Media Area (sq. ft.)		Number of Pleats Per Linear Foot	
		Width	Height	Depth		Standard	High	Standard	High	Standard	High
1"	10x10x1	9.50	9.50	0.75	347	0.35	0.52	1.1	1.2	13	15
	10x20x1	9.50	19.50		700			2.2	2.5		
	10x25x1	9.50	24.50		868			2.7	3.2		
	12x12x1	11.38	11.38		500			1.6	1.8		
	12x20x1	11.50	19.50		833			2.7	3.1		
	12x24x1	11.50	23.50		1000			3.2	3.7		
	12x25x1	11.75	24.75		1041			3.4	4.0		
	14x20x1	13.50	19.50		975			3.1	3.6		
	14x25x1	13.50	24.50		1220			3.9	4.5		
	15x20x1	14.50	19.50		1040			3.4	3.9		
	15x25x1	14.50	24.50		1302			4.2	4.9		
	16x16x1	15.75	15.75		888			3.0	3.4		
	16x20x1	15.50	19.50		1110			3.6	4.2		
	16x24x1	15.50	23.50		1333			4.3	5.0		
	16x25x1	15.50	24.50		1390			4.5	5.2		
	18x18x1	17.75	17.75		1125			3.8	4.3		
	18x20x1	17.50	19.50		1250			4.1	4.7		
	18x24x1	17.50	23.50		1500			4.9	5.7		
	18x25x1	17.50	24.50		1565			5.1	5.9		
	20x20x1	19.50	19.50		1390			4.5	5.2		
	20x24x1	19.50	23.50		1670			5.5	6.3		
	20x25x1	19.50	24.50		1740			5.7	6.6		
	22x22x1	21.75	21.75		1680			5.6	6.5		
	24x24x1	23.50	23.50		2000			6.6	7.6		
2"	10x20x2	9.50	19.50	1.75	700	0.24	0.38	4.0	6.0	10	15
	12x24x2	11.38	23.38		1000			5.8	8.7		
	14x20x2	13.50	19.50		975			5.6	8.5		
	14x25x2	13.50	24.50		1220			7.1	10.7		
	15x20x2	14.50	19.50		1040			6.1	9.1		
	16x20x2	15.50	19.50		1110			6.5	9.8		
	16x25x2	15.50	24.50		1390			8.1	12.2		
	18x18x2	17.75	17.75		1125			6.8	10.2		
	18x20x2	17.50	19.50		1250			7.3	11.0		
	18x24x2	17.38	23.38		1500			8.8	13.3		
	18x25x2	17.50	24.50		1565			9.2	13.8		
	20x20x2	19.50	19.50		1390			8.2	12.3		
	20x24x2	19.38	23.38		1670			9.8	14.8		
	20x25x2	19.50	24.50		1740			10.3	15.4		
	24x24x2	23.38	23.38		2000			11.9	17.8		
4"	12x24x4	11.38	23.38	3.75	1000	0.12	0.21	11.2	15.0	9	12
	16x20x4	15.50	19.50		1110			12.6	16.8		
	16x25x4	15.50	24.50		1390			15.8	21.0		
	18x24x4	17.38	23.38		1500			17.1	22.8		
	20x20x4	19.50	19.50		1390			15.8	21.1		
	20x24x4	19.38	23.38		1670			19.0	25.4		
	20x25x4	19.50	24.50		1740			19.8	26.5		
	24x24x4	23.38	23.38		2000			23.0	30.6		

Notes:

- 1", 2" & 4" deep filters are rated at 500 fpm.
- More sizes are available. Please consult Pamlico Portal or contact customer service at customerservice@pamlico-air.com.
- Performance data is based on ASHRAE Test Standards 52.2 – 2017.



GREEN IS THE BOTTOM LINE®
(888) 968-2369



PRIME11 | DS211-1120